


Performance curve Centrifugal pump CP30-170

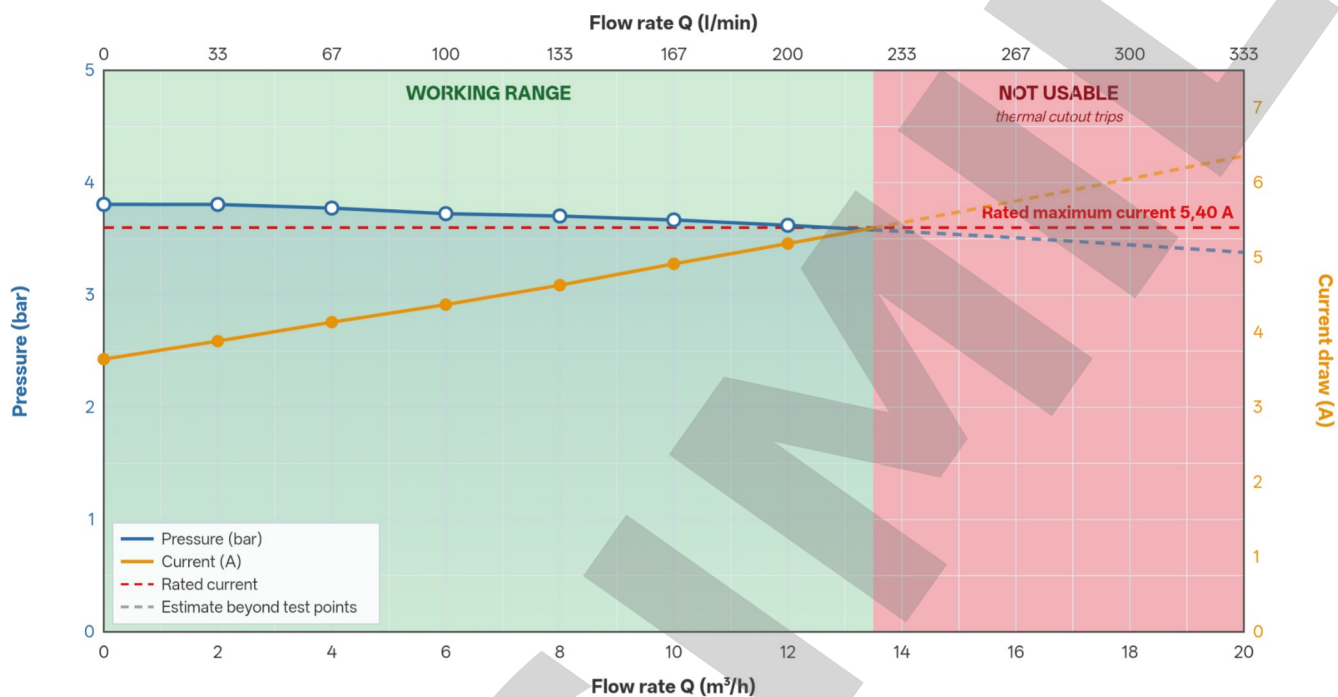

WORKING RANGE UP TO $\approx 13,5 \text{ m}^3/\text{h}$

beyond that flow rate the rated current of the electric motor is exceeded

PUMP AND TEST DATA

Serial no.		Max current	5.4 A
Model	CP30-170	Motor serial no.	
Date		Seal diameter	30 mm
Pump type	Centrifugal	Seal flushing	Self-flushing seal
Impeller diameter	170 mm	Stationary seal material	Special carbon
Motor power	3.0 kW	Rotating seal material	AISI316-L
Test voltage	400 V	Suction connection	DIN11851 DN 50 (female)
Rated frequency	50 Hz	Discharge connection	DIN11851 DN 40 (female)
Motor speed	2896 rpm		

Operator signature